

# INSTALLATION MANUAL

## 1. TOP TRACK

The surface to which the track is fixed must be even and straight. Position the top track flush against the wall or side panel and fix it with screws. When installing a multiple track system, align the tracks and fit them tightly against one another. Avoid applying excessive force when tightening screws to prevent track deformation.

## 2. BOTTOM TRACK

Position the bottom track on the floor, 8 – 12mm back from the front line of the top track. Use a level tool to make sure it is properly levelled. Use packers to adjust as necessary. Fix the track using screws or double-sided tape.

## 3. BOTTOM POSITIONER

The bottom positioner is a component that holds the door in place. If the track is to be fitted with bottom positioners, slip them into the respective tracks before fixing. Fully insert the sliding wardrobe door in the top track, taking care not to damage the bottom rollers, then align the bottom end of the sliding wardrobe door with the bottom track and slowly lower the door, letting the rollers snap into the positioner.

## 4. DOORS


Insert a door into the top track first and lift it high enough to push the bottom of the door over the bottom track into place. Check if the door travels smoothly along the entire width of the opening and install the remaining door leaves into their respective tracks.

## 5. ADJUSTMENT

When closed, doors should fit tightly against the wall or side panel. You can adjust the lateral door tilt using bolts located in the bottom rollers. Each bolt can adjust the door-to-bottom track gap 3 – 13 mm.



HORIZONTAL SECTION VIEW

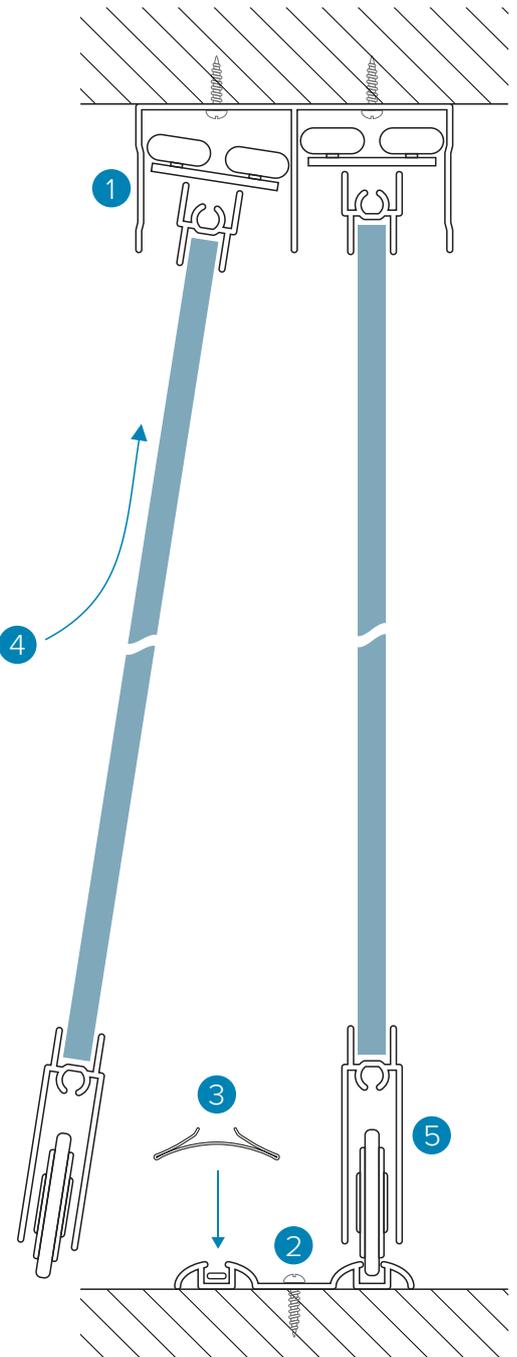

VERTICAL SECTION VIEW